

dimensions in mm
mass: 13 g

16C18 $\odot\odot$ • 30

16C18 $\odot\odot$ • 67

Winding Type

$\odot\odot$

-115

-210

-207

-205

-204

Measured Values

Measured Values	V	1.5	4.0	6.0	12.0	15.0
Measuring voltage	V	1.5	4.0	6.0	12.0	15.0
No-load speed	rpm	15300	14700	15700	16200	16000
Stall torque	mNm (oz-in)	1.1 (0.16)	1.3 (0.19)	1.1 (0.16)	1.2 (0.17)	0.8 (0.11)
Average No-load current	mA	74.8	23.0	18.4	10.4	6.9
Typical starting voltage	V	0.04	0.05	0.10	0.15	0.25

Max. Recommended Values

Max. continuous current	A	1.19	0.48	0.31	0.16	0.10
Max. continuous torque	mNm (oz-in)	0.98 (0.14)	1.13 (0.16)	1.0 (0.14)	1.0 (0.14)	0.79 (0.11)
Max. angular acceleration	10 ³ rad/s ²	127	110	148	99	117

Intrinsic Parameters


Back-EMF constant	V/1000 rpm	0.092	0.26	0.36	0.70	0.87
Torque constant	mNm/A (oz-in/A)	0.88 (0.12)	2.48 (0.35)	3.44 (0.49)	6.68 (0.95)	8.3 (1.18)
Terminal resistance	ohm	1.20	7.5	18.0	65.0	162
Motor regulation R/k ²	10 ³ /Nms	1555	1217	1523	1455	2347
Rotor inductance	mH	0.02	0.15	0.25	1.00	2.00
Rotor inertia	kgm ² 10 ⁻⁷	0.31	0.41	0.27	0.41	0.27
Mechanical time constant	ms	48	50	41	60	63

Executions

		Single Shaft	With F16
Gearbox	Page	16C18	16C18
B16	102	67	76
BA16	103	67	76
R16	104	30	76

- Thermal resistance: rotor-body 15°C/W, body-ambient 40°C/W
- Thermal time constant - rotor / stator: 4 s / 230 s
- Max. rated coil temperature: 100°C (210°F)
- Recom. ambient temperature range: -30°C to +85°C (-22°F to +185°F)
- Viscous damping constant: 0.04 x 10⁻⁶ Nms
- Max. axial static force for press-fit: 150 N
- End play: 150 µm
- Radial play: 30 µm
- Shaft runout: 10 µm
- Max. side load at 5 mm from mounting face:
 - sleeve bearings 0.5 N
 - ball bearings 3 N
- Motor fitted with sleeve bearings (ball bearings optional)

Max. Recommended Speed

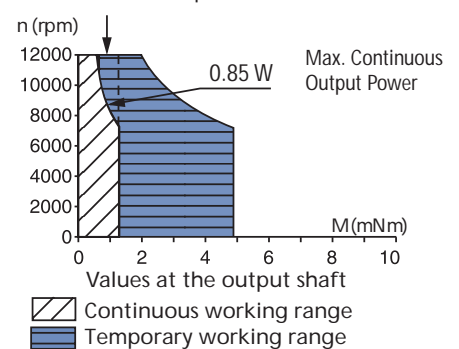

DANAHER MOTION is a registered trademark of Danaher Corporation. Danaher Motion makes every attempt to ensure accuracy and reliability of the specifications in this publication. Specifications are subject to change without notice. Danaher Motion provides this information "AS IS" and disclaims all warranties, express or implied, including, but not limited to, implied warranties of merchantability and fitness for a particular purpose. It is the responsibility of the product user to determine the suitability of this product for a specific application. ©2004 Danaher Motion.