


**DRACON****KE KITAGAWA****BESTELNUMMER: OMSCHRIJVING****Flexibel U-profiel**

Voor bescherming van randen in kasten en wanden t.b.v. kabeldoorvoer
Materiaal: 6/6 nylon (naturel), UL-approved (UL94-HB)

FLEXIBEL PROFIEL MET UITSPARINGEN

	Type:	A (mm)	b*c*d in mm.	lengte
8445.3002	KG-016L	1,7	3,7*4,0*1,2	500 mm
8445.3004	KG-024L	2,4	4,4*4,0*1,2	500 mm
8445.3006	KG-012	1,3	3,3*4,0*1,2	250 mm
8445.3008	KG-016	1,7	3,7*4,0*1,2	250 mm
8445.3010	KG-024	2,4	4,4*4,0*1,2	250 mm
8445.3012	KG-032	3,3	5,3*4,0*1,2	250 mm
8445.3014	KG-045	5,0	8,2*6,0*2,0	320 mm
8445.3016	KG-062	6,5	9,7*6,0*2,0	320 mm
8445.3018	KG-082	8,2	11,4*6,5*2,0	320 mm
8445.3020	KG-107	10,7	13,9*6,5*2,0	320 mm
8445.3022	KG-132	13,2	16,4*6,5*2,0	320 mm

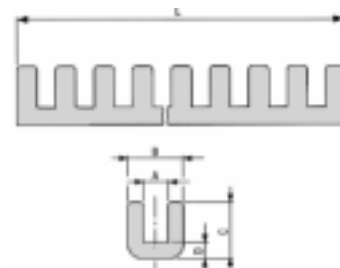


PROFIEL
MET
UITSPARINGEN
(KG)

FLEXIBEL PROFIEL MET ZAAGSNEDEN

	Type:	A (mm)	b*c*d in mm.	paneeldikte
8445.3202	CSG-012	1,3	3,3*5,0*1,0	1,2 mm
8445.3204	CSG-016	1,7	3,7*5,2*1,2	1,6 mm
8445.3206	CSG-024	2,4	4,4*5,2*1,2	2,3 mm
8445.3208	CSG-032	3,2	5,3*5,2*1,2	2,3 mm

op rollen van 100 meter

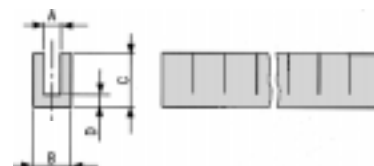


PROFIEL
MET
ZAAGSNEDEN
(CSG)

**FLEXIBEL PROFIEL
GESLOTEN UITVOERING**

	Type:	A (mm)	b*c*d in mm	paneeldikte
8445.3404	CE-012S	0,5	3,3*5,0*1,0	0,6-1,2 mm
8445.3406	CE-016	0,9	3,7*5,0*1,0	1,2-1,6 mm
8445.3408	CE-024	1,2	4,4*5,0*1,0	1,6-2,3 mm
8445.3410	CE-032	1,5	5,3*5,0*1,0	2,3-3,2 mm

verpakkingseenheid: 100 lengtes van 1 meter

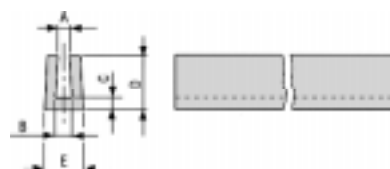


PROFIEL
GESLOTEN
(CE)

RANDZADELS

Voor bescherming van doorvoerrand in plaatmateriaal t.b.v. draad en kabel. Materiaal: 6/6 nylon, UL-approved (UL94V-2)

	Type:	doorvoer-	kleur:	paneeldikte (mm)
8445.3502	EDS-1	6,5*11,6	zwart	0,8-1,2 mm
8445.3504	EDS-2	6,5*11,6	naturel	1,2-1,6 mm
8445.3506	EDS-3	6,5*11,6	grijs	1,6-2,0 mm
8445.3522	EDS-1717U	16,8*16,8	naturel	0,8-1,6 mm
8445.3532	EDS-1208U	7,8*11,6	naturel	0,8-1,6 mm
8445.3542	EDS-2323U	22,8*22,8	naturel	0,8-1,6 mm

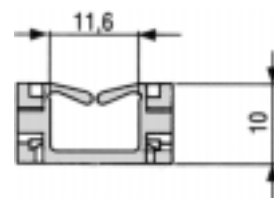

RANDZADELS
(EDS)