




CSM05

FAST AND EASY INTERGRATION OF APS MECHANIMS

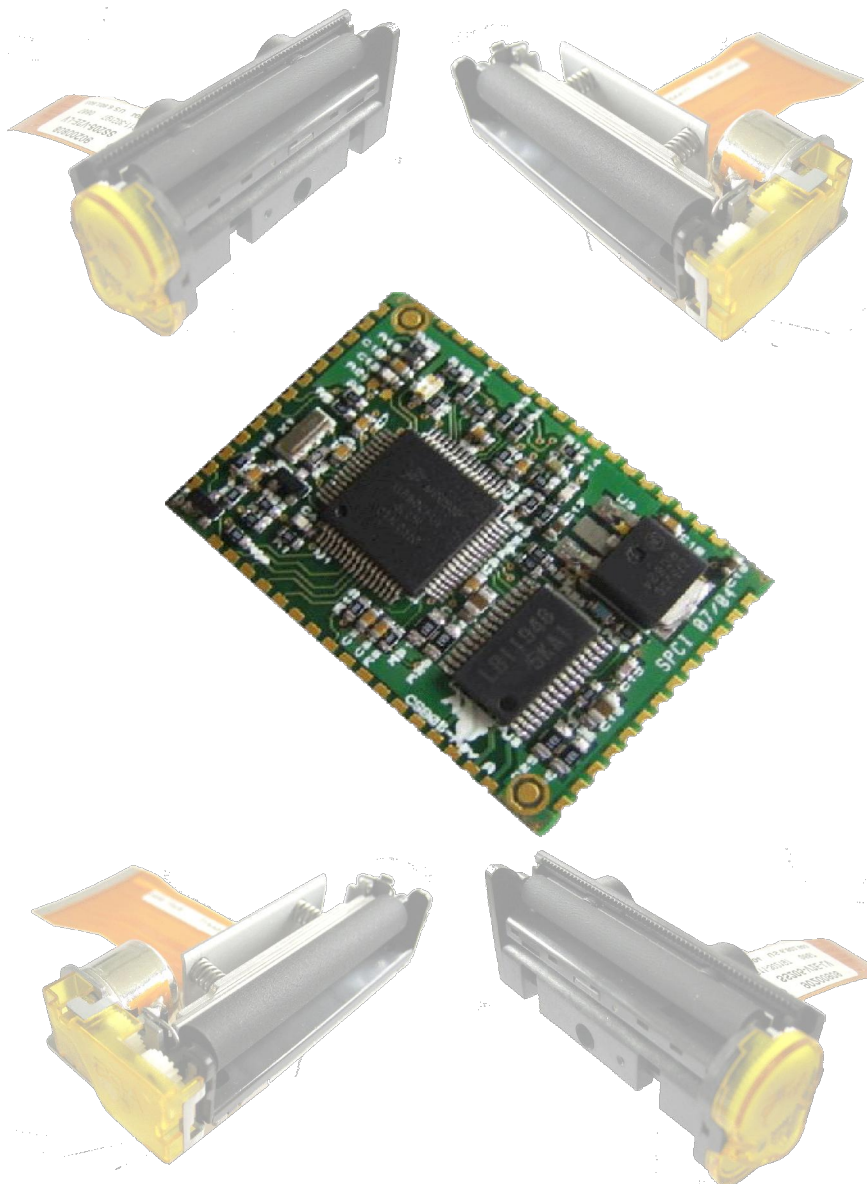



FEATURES

- Drive any APS 5V mechanisms
- Easy hardware configuration
- Wide power supply range (4.5V to 9.5V)
- Printing speed Up to 60mm/s
- 3 default communication ports
 - RS232 TTL
 - General purpose parallel interface (8051 bus type)
 - I2C Interface

APPLICATIONS

- Cash register
- EFT

** Patent pended design*

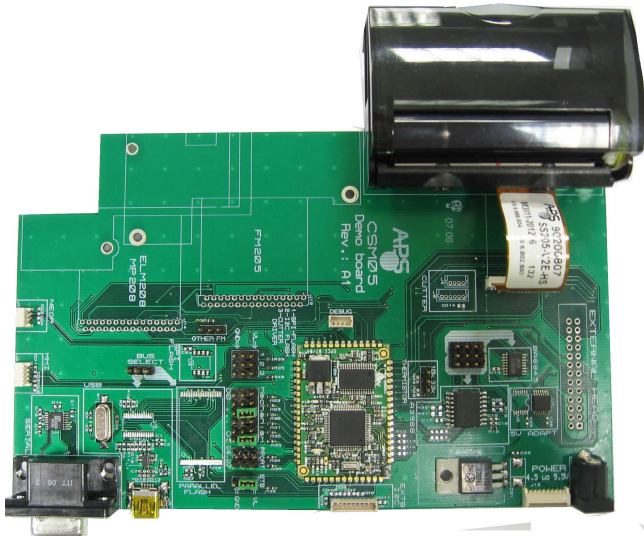

SPECIFICATIONS	
Printing method	Thermal dot line printing
Number of dots	832 max
Printing speed (mm/s)	Up to 60*
Paper detection	Opto sensor*
Temperature detection	In board thermistor and mechanism control
Voltage range	From 4.5V to 9.5V
Weight (g)	± 10
Operating temperature (C°)	-20 to +50
Operating humidity (%)	20 to 85 non cond.
Dimensions (WxDxH mm)	39 x 27 x 6

** Depending on printer mechanisms*